

DEMOLITION NOTES



1. SEE ENGINEERING PLANS FOR DEMOLITION OF UTILITY FEATURES.
2. PROVIDE TREE PROTECTION FENCING AS NOTED AND LOCATED ON PLAN. TREE PROTECTION SHOULD BE LOCATED AROUND THE DBPL LINE, TYP.
3. ALL TREES WITH DEMOLITION WITHIN THE PROTECTIVE FENCING LIMIT OF 100' SHALL BE BARRICADED PRIOR TO DEMOLITION. THESE TREES SHALL BE MAINTAINED THROUGH DEMOLITION UNLESS OTHERWISE INSTRUCTED BY THE OWNER'S REPRESENTATIVE.
4. MATERIAL TO BE DEMOLISHED IN THE PROTECTIVE AREA SHALL BE INCLUDED IN THE BARRICADE OR MARKED ON THE MATERIAL ITSELF. TREES OUTSIDE THE CONSTRUCTION AREA THAT HAVE DEMOLITION IN THEIR PROTECTIVE RADII SHALL BE BARRICADED AS WELL.
5. BARRICADES SHALL BE INSPECTED BY THE OWNERS REPRESENTATIVE BEFORE DEMOLITION STARTS.
6. ALL DEMOLITION INSIDE OF THE BARRICADES WILL BE BY HAND TOOLS. LARGER EQUIPMENT MAY BE USED AFTER NOTIFICATION AND APPROVAL BY THE OWNERS REPRESENTATIVE.
7. NO BELOW GROUND UTILITIES SHALL BE REMOVED FROM THE PROTECTIVE RADII OF EXISTING TREES. ABANDON IN PLACE. DO NOT REMOVE CLEANS-OUTS IN THE BARRICADE AREAS.
8. STUMPS FOR TREES TO BE REMOVED SHALL BE TAKEN OUT IN THE FOLLOWING MANNER: ROOT PRUNE ON FOUR SIDES OF THE TREE TO A MINIMUM OF 12\"/>

DEMOLITION LEGEND

- Buildings to remain
- Building and sitework to be removed. Contractor to verify extent of demolition shown
- Existing trees to be removed with root mass-slewwork
- Tree Protection not to be removed until construction within line of protection must begin.
- Limit of work.
- Existing fence to be removed and relocated.

DEMOLITION KEY

- A. Remove all above grade and below grade construction. Included BUT NOT LIMITED TO: Buildings, concrete slabs and paving, retaining walls, footings and curbs, benches, drinking fountains and site furniture, asphalt and gravel paving, chain link fencing.
- B. Remove fencing including foundation and turn materials over to Owner, if requested. Otherwise dispose of off site.
- C. Verify with Owner existing items to be removed and turned over to Owner.
- D. Contractor to control site erosion wash-out at the limit of work line and on all site drainage structures. Refer to Civil for Erosion Control Site Plan.
- E. Concrete wash-out site for all wash-out of ready mix trucks and concrete shall be in a designated pit placed a minimum of 20 feet from all buildings and structures and 10 feet from the site before project closeout. The pit location must be approved by the Architect and Owner's Representative.
- F. Construction fence to follow limit of work line where existing fence is not present. See Specifications.
- G. Saw cut existing paving.

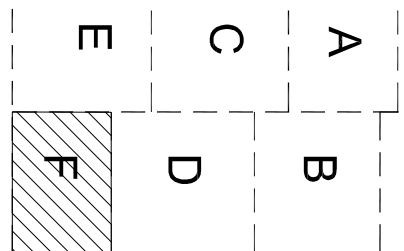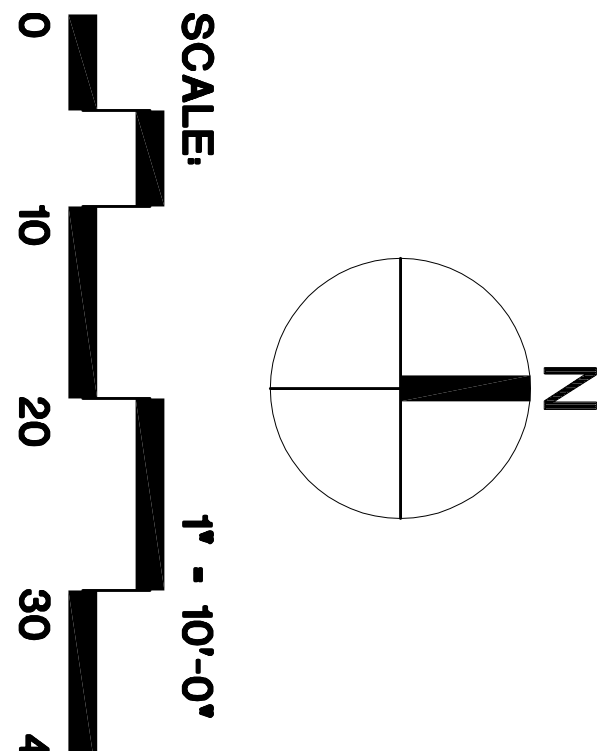

ADDENDUM ADDED 1/25/08

NO. REVISIONS/DESCRIPTIONS DATE

**TORRE DESIGN CONSORTIUM, LTD**  
A PROFESSIONAL ARCHITECTURAL CORPORATION  
ARCHITECTURE LANDSCAPE ARCHITECTURE  
PLANNING INTERIOR DESIGN  
5006 MAGADINE ST., NEW ORLEANS, LOUISIANA 70115-7776 (504)998-3263 FAX (504)997-5088

PROJECT TITLE  
**MEMPHIS ZOO AND  
AQUARIUM IMPROVEMENTS  
TETON TREK**

DRAWING TITLE  
**DEMOLITION PLAN F**

SEAL	DESIGNED	PROJECT NO.	28005
	DRAWN	SCALE	1" = 10'-0"
	RA		
	CHECKED	DRAWING NO.	DP06
	REVIEWED		
DATE	9/07		13 of 240